

EMT-150-HL

Magnetic Dimmable

Outdoor Black Powder Coated Steel Enclosure

Multi Tap: **12-15VAC**

Total Wattage: **150W max**


Input Voltage: **120V 60Hz**



www.emcod.com



Conforms to UL STD. 1838
Certified to CSA
STD. C22.2 No 250.0, 250.7

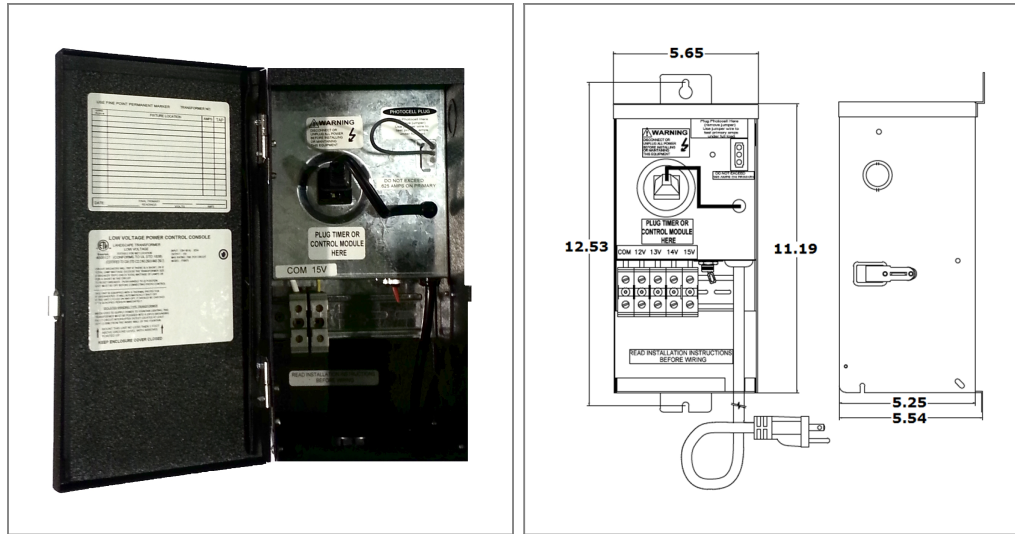

Transformer

Dimmable with any LV magnetic dimmer as long as you cover dimmer's min load.

Temperature class B(130°C)

Input leads: Line cord

Output leads: Terminal Block

Magnetic manually reset secondary breaker 12.5A

Timer and photocell build in options

Housing

The actual transformer 150W is encapsulated in the enclosure


The enclosure is Black Powder Coated Steel, NEMA 3R rated

Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 11.2, W = 5.65, D = 5.5

Weight (LBs): 11.7

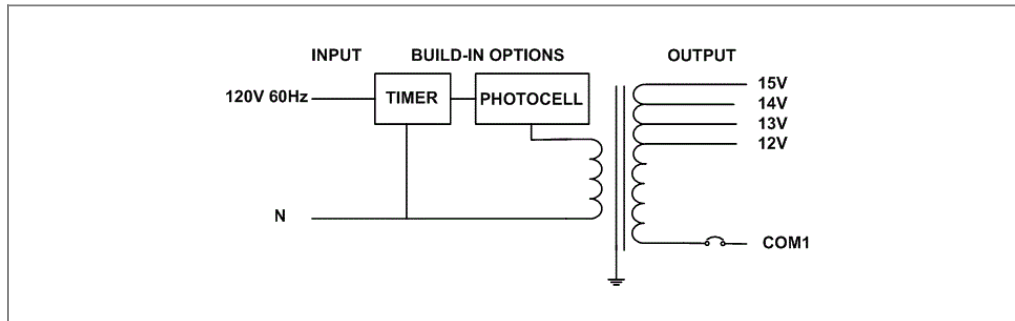

Electrical Parameters

Input Voltage:	120V 60Hz
Max. input current at full load:	1.25A
Output voltage without load:	12/ 13.2/ 13.9/ 15.1VAC
Output voltage fully loaded:	11/ 12.2/ 13/ 14VAC
Max. Total Wattage:	150W
Max. Output Current:	12.5/ 11.5/ 10.7/ 10A
Efficiency:	90%
Load regulation:	8%

Mailing Address: 15545 Cabrito Rd. Van Nuys, CA 91406 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com