

## EMT-150-SSH

### Magnetic

Outdoor Stainless Steel Enclosure


Multi Tap: **12-15VAC**

Total Wattage: **150W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838  
Certified to CSA  
STD. C22.2 № 250.0, 250.7

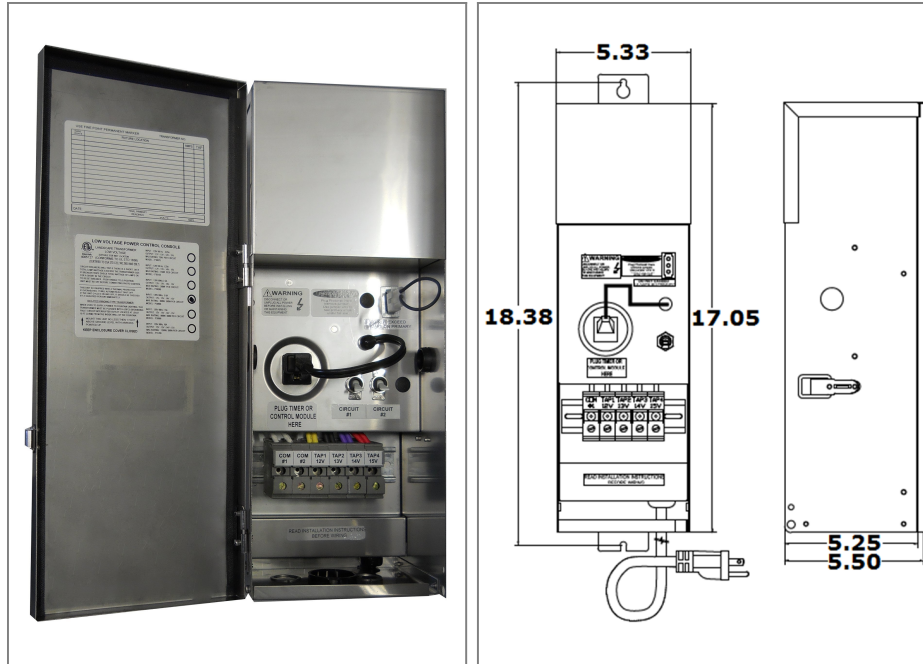

### Transformer

Temperature class B(130°C)

Input leads: Line cord

Output leads: Terminal Block

Magnetic manually reset secondary breaker 12.5A

Timer and photocell build in options

### Housing

The actual transformer 150W is encapsulated in the enclosure

The enclosure is Stainless Steel, NEMA 3R rated

Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 17.05, W = 5.33, D = 5.5

Weight (LBs): 1.66

### Electrical Parameters

Input Voltage: **120V 60Hz**

Max. input current at full load: **1.25A**

Output voltage without load: **12/ 13.2/ 13.9/ 15.1VAC**


Output voltage fully loaded: **11/ 12.2/ 13/ 14VAC**

Max. Total Wattage: **150W**

Max. Output Current: **12.5/ 11.5/ 10.7/ 10A**

Efficiency: **90%**

Load regulation: **0.08%**

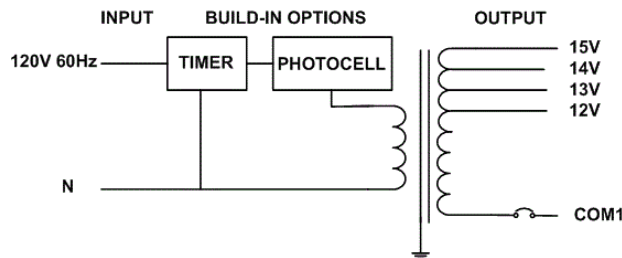

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com