

ECV600(12/24/36/48)D

UNIV 5 in 1 dimming

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **12/24/36/48VDC 20kHz PWM or Linear**

Total Wattage: **600W max**


Input Voltage: **110-277V 50/60Hz**



www.emcod.com



Conforms to UL STD.
Certified to CSA
STD. C22.2 № 250.13
[Link to certification](#)

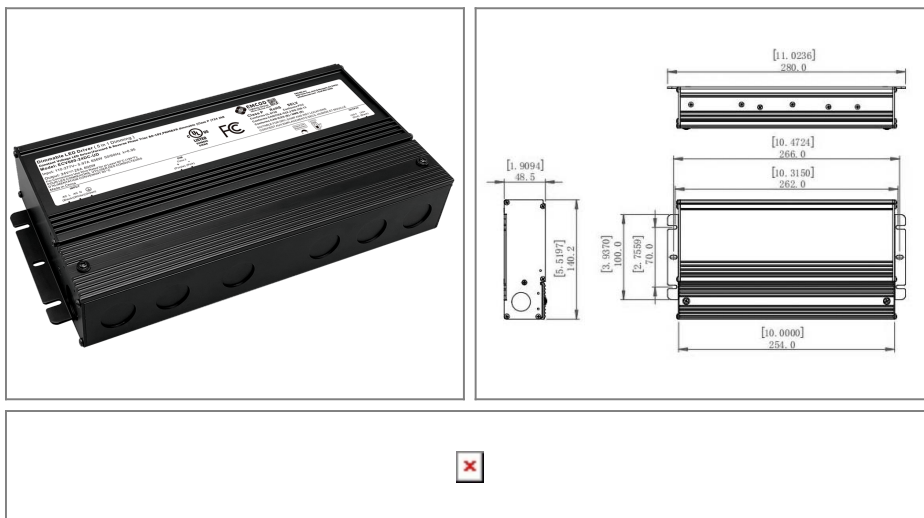

Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM
Temperature class B(130°C)

Housing

The actual transformer 600W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, Dry, Damp and Wet Location rated
Enclosure Temperature does not exceed 80°C at 45°C ambient and fully loaded

Dimensions (inch): H = 0, W = 0, D = 0

Weight (LBs): 0

Electrical Parameters

Input Voltage: **110-277V 50/60Hz**

Max. input current at full load: **0A**

Output voltage without load: **0VDC**

Output voltage fully loaded: **0VDC**

Max. Total Wattage: **600W**

Max. Output Current: **0A**

Efficiency: **0%**

Load regulation: **0%**

Ripple: **0%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 techsupport@emcod.com