

## EMT1200SS-22E

### Magnetic

Outdoor Stainless Steel Enclosure


Multi Tap: **12-22VAC**

Total Wattage: **1200W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838  
Certified to CSA  
STD. C22.2 No 250.0  
model -

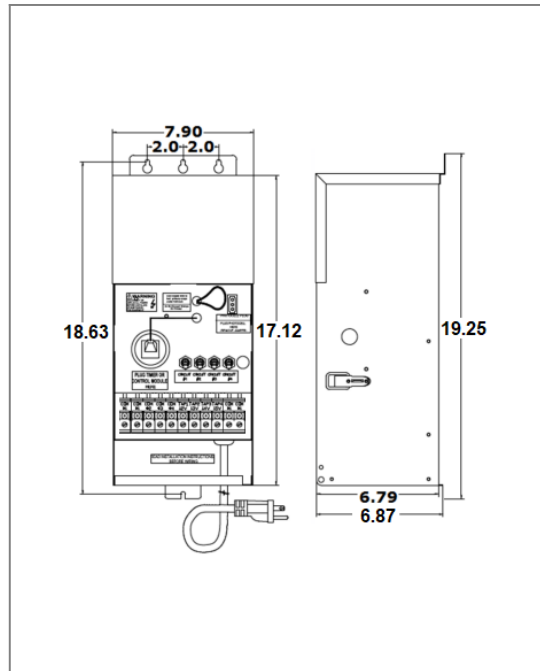

### Transformer

Temperature class B(130°C)

Two section bobbin completely separated primary and secondary windings

Input leads: Line cord

Output leads: Terminal Block

Leads max. operational temperature is 105°C

Magnetic manually reset secondary breaker 25A per circuit

Timer and photocell build in options

### Housing

The actual transformer 1200W is encapsulated in the enclosure

The enclosure is Stainless Steel, NEMA 3R rated

Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 18.62, W = 7.8, D = 6.87

Weight (LBs): 47

### Electrical Parameters

Input Voltage: **120V 60Hz**

Max. input current at full load: **10A**


Output voltage without load: **12.5/ 14.5/ 15.5/ 16.5/ 18.5/ 20.5/ 22.5VAC**

Output voltage fully loaded: **11.5/ 13.5/ 14.5/ 15.5/ 17.5/ 19.5/ 21.5VAC**

Max. Total Wattage: **1200W** Max. per circuit: **300W**

Max. Output Current: **25/ 21/ 20/ 19/ 17/ 15/ 13.6A** per circuit.

Efficiency: **95%**

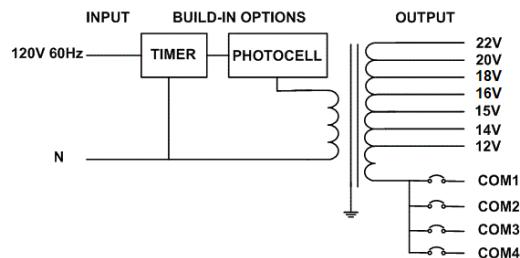

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 [info@emcod.com](mailto:info@emcod.com) [techsupport@emcod.com](mailto:techsupport@emcod.com)