

## EPC75W

### Magnetic Non Dimmable MT

Outdoor Black Powder Coated Steel Enclosure


Multi Tap: **12VAC and 15VAC**

Total Wattage: **75W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838  
Certified to CSA  
STD. C22.2 № 250.0, 250.7

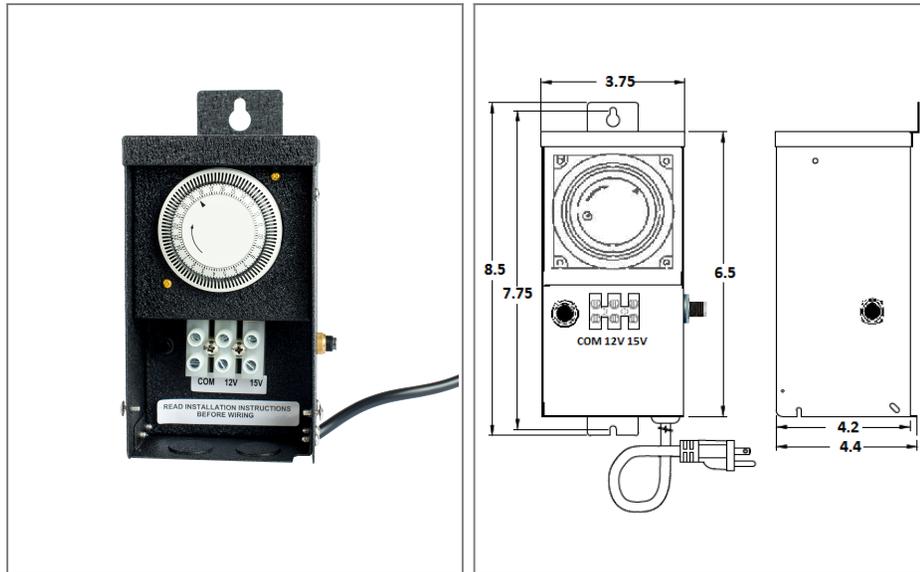

### Transformer

Non dimmable if use timer or/and photocell  
Temperature class B(130°C)  
Thermal manually reset secondary breaker 12A  
Timer and photocell build in options

### Housing

The actual transformer 75W is encapsulated in the enclosure  
The enclosure is Black Powder Coated Steel, NEMA 3R rated  
Wiring compartment has 2 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 65°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 8.5, W = 3.75, D = 4.4  
Weight (LBs): 0.5

### Electrical Parameters

Input Voltage: **120V 60Hz**

Max. input current at full load: **0.75A**

Output voltage without load: **12/ 15VAC**

Output voltage fully loaded: **11.5/ 14.5VAC**


Max. Total Wattage: **75W**

Max. Output Current: **6.2/ 5A**

Efficiency: **90%**

Load regulation: **0%**

Ripple: **0%**

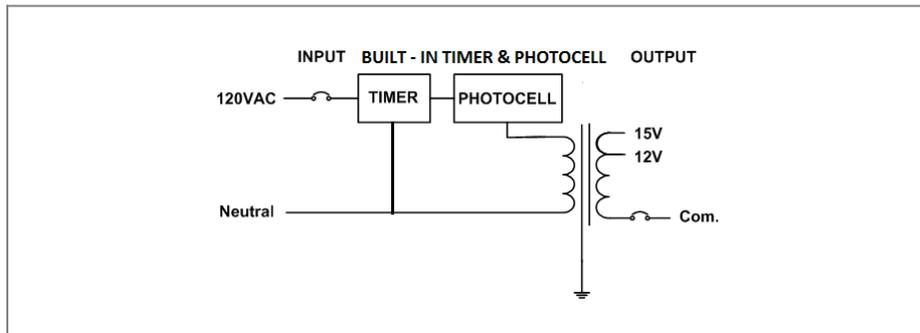

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309  
Fax: 818 904 3327 [info@emcod.com](mailto:info@emcod.com) [techsupport@emcod.com](mailto:techsupport@emcod.com)