MLE60-24DC-P

Class 2 Electronic Phase cut Dimmable

Outdoor Plastic Suitable For Dry And Damp Location Enclosure

Single Circuit: **24VDC 120Hz**


Total Wattage: **60W max**


Input Voltage: **120V 50/60Hz**

www.emcod.com

Conforms to UL STD. 8750 and 1310
Certified to CSA
STD. C22.2 № 223
model MLE60-24DC-P



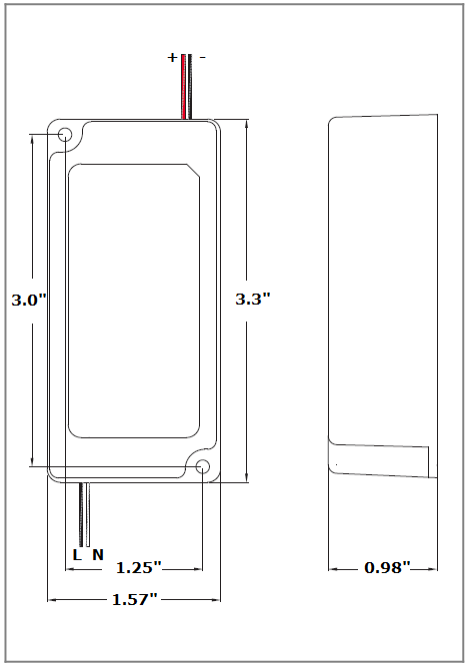

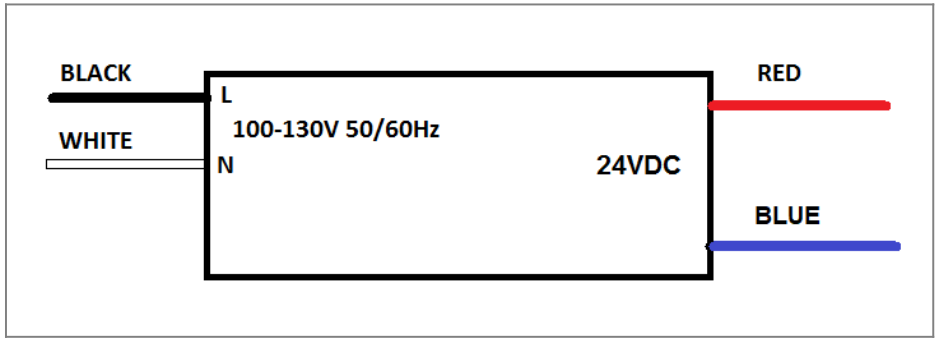

Transformer

Dimmable with compatible MLV, ELV, CL dimmers, please refer to list on emcod.com
Input leads are 18AWG 600V
Output leads are 18AWG 300V
Leads max. operational temperature is 105°C

Housing

The actual transformer 60W is encapsulated in the enclosure
The enclosure is Plastic suitable for dry and damp location, fit in 4" junction box, IP20 rated
Enclosure Temperature does not exceed 95°C at 45°C ambient and fully loaded
Dimensions (inch): H = 1.57, W = 3.3, D = 0.98
Weight (LBs): 0.4

Electrical Parameters

Input Voltage:	**120V 50/60Hz**
Max. input current at full load:	**0.58A**
Output voltage without load:	**24.5VDC**
Output voltage fully loaded:	**23.5VDC**
Max. Total Wattage:	**60W**
Max. Output Current:	**2.5A**
Efficiency:	**89%**
Load regulation:	**5%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com