

ECV600(12/24/36/48)D

UNIV 5 in 1 dimming

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **12/24/36/48VDC 20kHz PWM or Linear**

Total Wattage: **600W max**


Input Voltage: **110-277V 50/60Hz**



www.emcod.com



Conforms to UL STD.
Certified to CSA
STD. C22.2 № 250.13
[Link to certification](#)

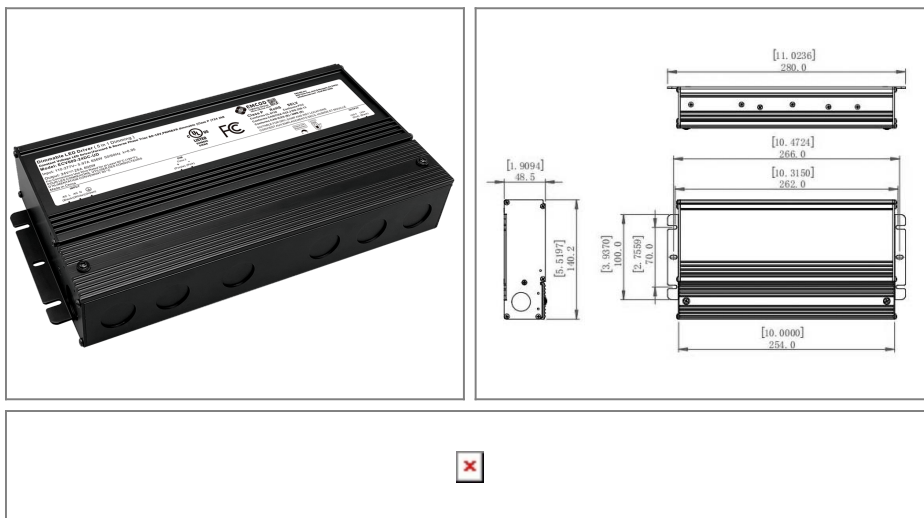

Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM
Temperature class B(130°C)

Housing

The actual transformer 600W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, Dry, Damp and Wet Location rated
Enclosure Temperature does not exceed 80°C at 45°C ambient and fully loaded
Dimensions (inch): H = 0, W = 0, D = 0
Weight (LBs): 0

Electrical Parameters

Input Voltage:	110-277V 50/60Hz
Max. input current at full load:	0A
Output voltage without load:	0VDC
Output voltage fully loaded:	0VDC
Max. Total Wattage:	600W
Max. Output Current:	0A
Efficiency:	0%
Load regulation:	0%
Ripple:	0%

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 techsupport@emcod.com