

## MLE60-12DC-P

### Class 2 Electronic Phase cut Dimmable

Outdoor Plastic Suitable For Dry And Damp Location Enclosure

Single Circuit: **12VDC**

Total Wattage: **60W max**

Input Voltage: **120V 50/60Hz**




Conforms to UL STD. 8750 and 1310  
Certified to CSA  
STD. C22.2 No 223  
model MLE60-12DC-P

## Installation Instruction for



- \* Read instruction completely before installation.
- \* Turn off electricity before wiring.
- \* Only qualified personal should install the unit
- \* Installation must comply with the NEC.
- \* Ensure the unit has input, output voltage and output wattage proper for your application.

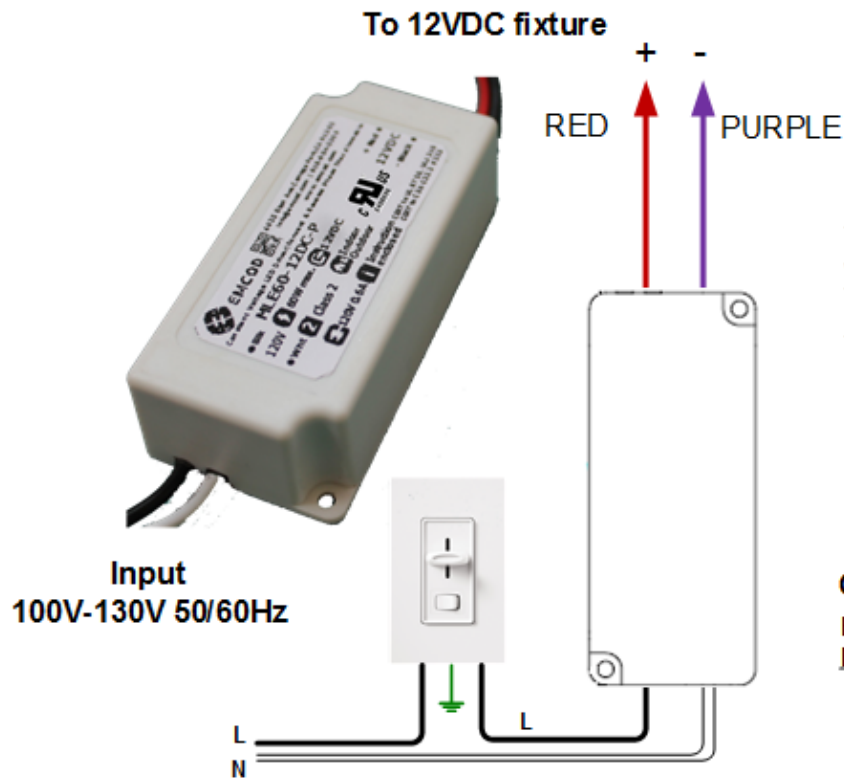

### Mounting

The transformer must be mounted in at least 5" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperature should not exceed 50 deg. C (110 deg. F)

Suitable for dry or damp location, IP20.

### Input Connection

Bring your line and neutral wires and connect them to the driver's Black and White lead wires.

### Output Connection

Bring your lights wires and connect to the driver's lead wires, + to Red – to PUTPLE  
Make sure all your connection are tight

### Grounding

If use junction box connect your power's ground to the junction box ground screw.

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309  
Fax: 818 904 3327 [info@emcod.com](mailto:info@emcod.com) [techsupport@emcod.com](mailto:techsupport@emcod.com)