

ECV30-12DC-UD

Class 2 Electronic Class P UNIV 5 in 1 dimming

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **12VDC 4kHz PWM or Linear**

Total Wattage: **30W max**


Input Voltage: **100-277V 50/60Hz**



www.emcod.com



Conforms to UL STD. 8750
Certified to CSA
STD. C22.2 No 250.0

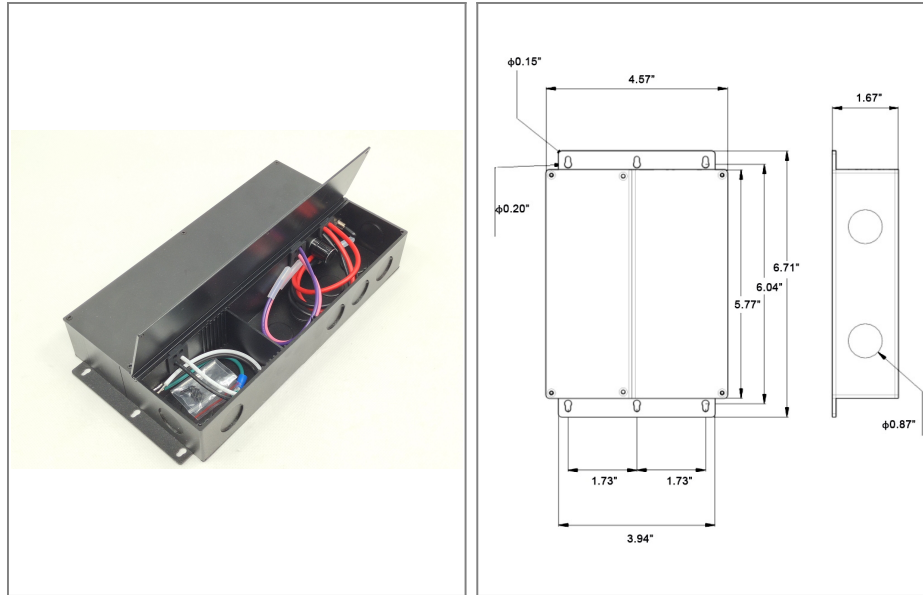

Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM

Input leads are 18AWG 600V

Output leads are 18AWG 300V

Leads max. operational temperature is 105°C

Housing

The actual transformer 30W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, NEMA 4X rated

Wiring compartment has 8 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded

Dimensions (inch): H = 6.7, W = 4.5, D = 1.65

Weight (LBs): 1.87

Electrical Parameters

Input Voltage: **100-277V 50/60Hz**

Max. input current at full load: **0.5A**

Output voltage without load: **12.1VDC**


Output voltage fully loaded: **12VDC**

Max. Total Wattage: **30W**

Max. Output Current: **2.5A**

Efficiency: **78%**

Load regulation: **0.5%**

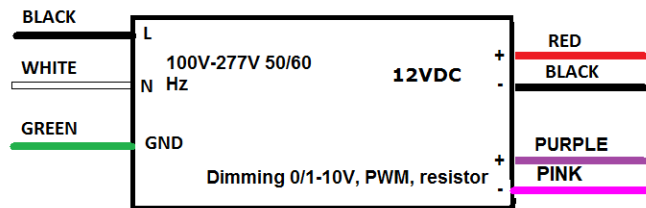

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com